





ELECTRIC WITHOUT COMPROMISE.

ZERO CO₂ EMISSIONS



The new E-Doblò, in addition to its diesel and petrol versions, completes the Fiat Professional electric range: its 100 kW powerful electric motor and the 50 kw/h battery can guarantee efficient, smooth and responsive driving for up to 280 km* with a maximum speed of 130 km/h. Up to 80% battery recharge in 30 minutes with FAST CHARGE.

Designed for the best performance that the vehicle can provide for your day-to-day work.

A NEW CONCEPT OF MOBILITY







DRIVING MODES

Optimize vehicle performance according to your needs. In the new E-Doblò you have 3 ways to manage vehicle performance and consumption: normal, eco and power.



MAGIC PLUG

The Magic Plug is an optional dedicated to outfitted vehicles and offers considerable advantages. It consists of an electrical socket inside the vehicle that allows you to adapt to specific missions, such as connecting a refrigerator, a mobile workshop or any other 230v or 12v electrical tool.



FAST CHARGING (DC) 100KW eProWallbox (AC) 7,4 KW – eProWallbox (AC) 22 KW

The new Fiat Professional E-Doblò has a charging system that includes standard solutions such as the cable supplied or, on request, the Wallbox for fast charging.



ELECTRICAL ZERO COMPROMISE

The 50 kWh Battery and 100kW power can ensure an autonomy up to 280 km in WLTP range and a top speed of 130 km/h with zero CO₂ emissions. Its powerful Quick Charge system with 100 kW will charge 80% of your battery in just 30 minutes.



DESIGN IN ITS BEST SHAPE.



All the space you need for your business is available in the new Doblò, with an eye also to the elegant lines and practical design of the exterior.


3090 2167 3440 CAPACITY CARGO LENGTH

A STAR PLAYER FOR THE CARRYING CAPACITY.




Need more load length? The Magic Cargo feature increases the versatility of the vehicle's interior, allowing to increase the length and working volume:

higher cargo capacity, increased in +0,5 m³
and a working length up to 3,44 meters.

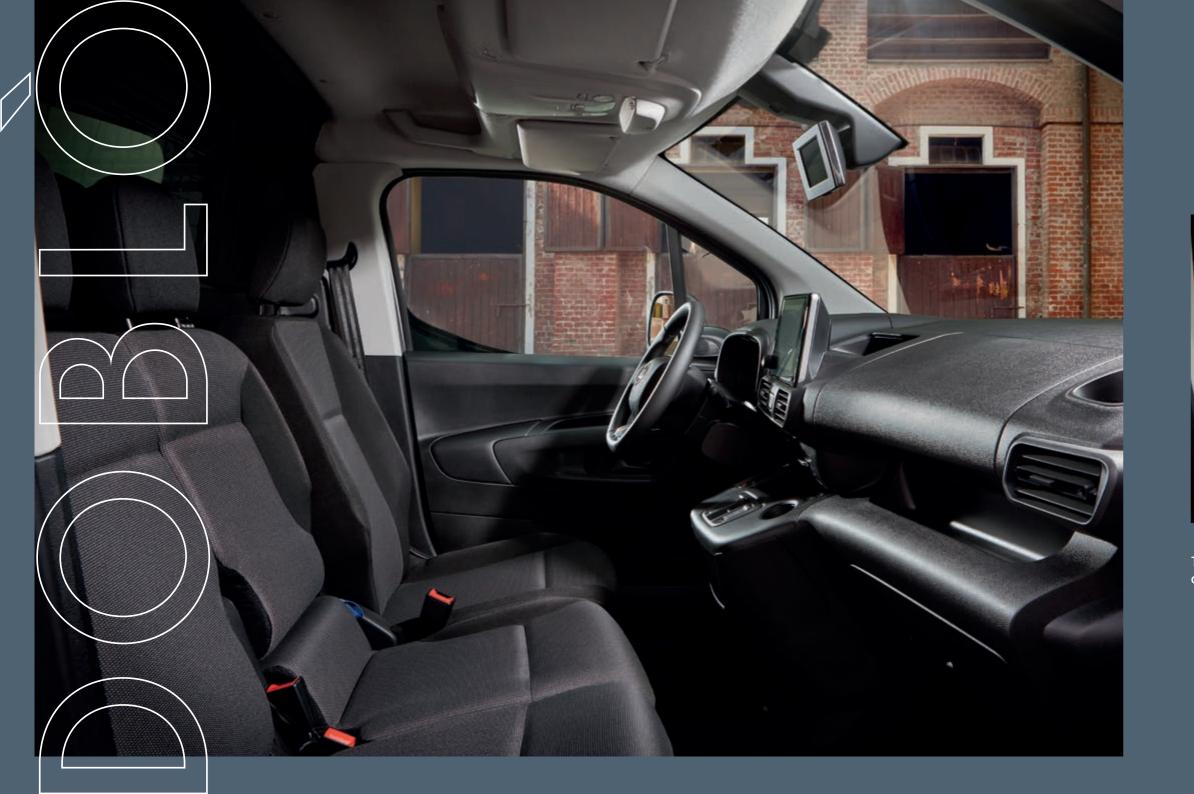

MORE VERSATILITY, MORE POSSIBILITIES.



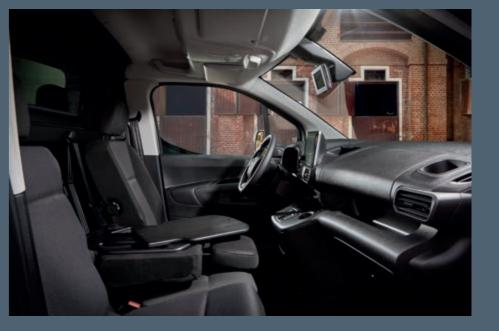

Thanks to the flexible three seats bench, you can configure the cabin in many different ways, getting a greater volume of cargo in the passenger compartment, more stability of bulky and secure fragile packages, while still maintaining two seats.

A PAYLOAD FOR ALL TASTES.

LIGHTEN YOUR WORK




With a payload up to 1000 kg and a cargo volume up to 4,4 m³ the new Doblo is the suitable vehicle for every loading needs.



COMFORT MARRIED TO YOUR NEEDS.

MOBILE OFFICE

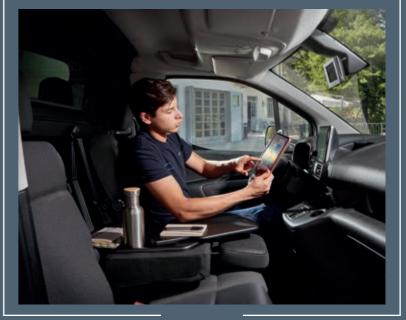

The entire inside space was tailored to your needs.

Versatile and modular, the new Doblò offers different
space configurations: thanks to a smart and easy
to organize interior, quickly create a comfortable office
seating while transporting the most varied objects.




YOUR JOB IS IN SAFE HANDS.



The Magic Mirror is an innovative feature that displays the images captured by 2 cameras on the 5" digital rearview mirror, providing 3 different views to perform any maneuver in complete safety.

Furthermore a full range of active and passive ADAS (Advance Driving Assistance Systems) will provide a safe trip, assisting while driving and maneuverering.





ACTIVE AND PASSIVE ADAS

70/1

HEADUP DISPLAY












DRIVING ATTENTION ALERT + COFFEE BRAKE ALERT

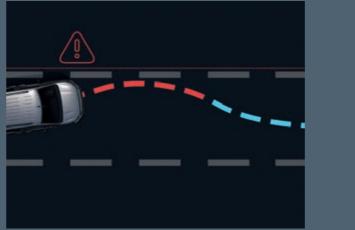

LANE KEEPING ASSIST



FORWARD COLLISION WARNING




KEYLESS ENTRY AND START



MAGIC MIRROR



TRAFFIC SIGNAL RECOGNITION



BLIND SPOT DETECTION



CONNECTED TO ANY REQUEST.

TECHNOLOGICALLY ADVANCED



The new Doblò features new connectivity and infotainment technologies to face all the daily challenges of work.





COMBI N1 Standard

All the room you need for the whole team, equipped with added features for comfort and connectivity.

CREW CAB Maxi

Get the flexibility to choose between more space for people or cargo and do what you want.

PANEL VAN Standard and Maxi

Get your job done without ever compromising.

A WINNING TEAM IN EVERY FIELD.

THREE VERSIONS, ONE BUSINESS



The new Fiat Professional Doblò is available in 3 versions: Combi, with fixed bulkhead; Crew Cab, with a unique modularity system between seat and cargo space thanks to a sliding bulkhead; Panel Van, in two lengths, Standard and Maxi.



CUSTOMIZED CONFIGURATIONS



ISOTHERMAL









POLICE



FIREFIGHTER



AMBULANCE



ASSISTANCE



DELIVERIES




1796 / 1860

4403 / 4753

STANDARD

- 1 sliding door
- TPMS
- Cruise control
- Manual AC
- Radio

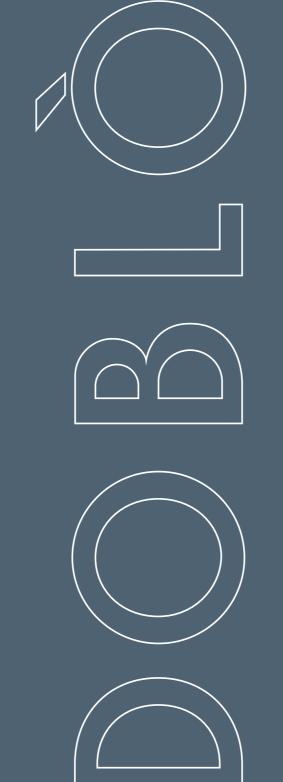





GELATO WHITE



CINEMA BLACK



MAESTRO GREY



COLOSSEO GREY



HUB CAP 15"/16"

WHEELS



FULL WHEEL COVER 16"




ALLOY WHEEL RIM 16"





NEW DOBLÒ


VERSIONS





EXTERNAL DIMENSION (MM)

















MAXI

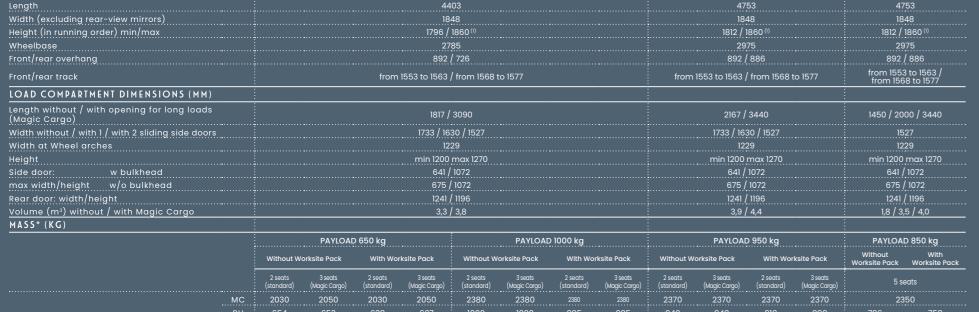

STANDARD

MASS* (KG)										:					
			PAYLOAD	650 kg			PAYLOAD	1000 kg			PAYLOAD	950 kg		PAYLOAI	850 kg
		Without W	orksite Pack	With Wo	ksite Pack	Without W	orksite Pack	With Wor	ksite Pack	Without W	orksite Pack	With Wo	rksite Pack	Without Worksite Pack	With Worksite Pack
		2 seats (standard)	3 seats (Magic Cargo)	5 se	ats										
	МС	2030	2050	2030	2050	2380	2380	2380	2380	2370	2370	2370	2370	23	50
BlueHDi 130 S&S EAT8	PU	654	653	638	637	1000	1000	985	985	940	940	919	899	796	758
BIUEHDI 130 5&5 EAT8	L		1200 /	/ 1075			1200/1400		1200/1400			1111 / 1239			
	RIM		135	0			100	00			100	00		10!	50
	МС	2020	2040	2020	2040	2370	2390	2370	2390	2380	2400	2380	2400	23	50
	PU	658	657	642	641	1002	1001	987	987	1033	1045	950	970	823	785
BlueHDi 130	L	1200 / 1075			1200/1400			1200/1400			1078	1272			
	RIM	1500		1000		1200			108	30					
BlueHDi 100	мс	1980	2000	2000	1980	2340	2370	2340	2370	2350	2370	2350	2370	23	50
	PU	660	605	573	532	925	934	910	919	879	878	864	865	823	785
	L	1100	/1075		/1075		1200/	1400		<u> </u>	1200/	1400		1077 /	1273
	RIM		135	0			100	00			100	00		125	50
Puretech 110 S&S	МС	1940	1960	1930	1960	2320	2315	2300	2315	2290	2290	2290	2290	_	
	PU	660	659	622	640	1023	997	988	995	951	943	922	901		
	L	1100	/1075	1200	/1075		1200/	1400			1200/	1400		-	
	RIM		69	0			69	90		730	740	740	750		

^{*} The indicated payloads may vary according to the final configuration of the vehicle ⁽¹⁾ with worksite pack


PU: PAYLOAD - RIM: TOWABLE MASS - MC: TOTAL MASS - L: LIMIT LOAD FRONT/REAR


TECHNICAL SPECIFICATION


		GASOLINE		DIESEL	
ENGINE		PURETECH 110 CV S&S	BLUEHDI 100	BLUEHDI 130	BLUEHDI 130 S&S EAT8
Displacement (cm³)		1199	1499	1499	1499
Max power (kW @rpm)		81 @ 5500	75 @ 3500	96 @ 3750	96 @ 3750
Max Torque (Nm @rpm)		230 @ 1750	250 @ 1750	300 @ 1750	300 @ 1750
Stop&Start				Y	
Anti-pollution regulation		Euro 6.4	Euro 6.4	Euro 6.4	Euro 6.4
GEARBOX					
Traction			Fr	ont	
Gearbox		6-speed manual	6-speed manual	6-speed manual	Automatic 8-speed
CAPACITY					
Fuel tank (liters)		61		53	
BRAKES					
Front			Self-ventilate	d discs 283x26	
Rear				268 x 12	
TYRES					
Front	Standard Payload	195/65 R15 91 H	195/65 R15 91 H	205/60 R16 96 H	205/60 R16 96 H
Rear	Increased Payload	205/60 R16 96 H	205/60 R16 96 H	205/60 R16 96 H	205/60 R16 96 H rear
SUSPENSIONS					
Front		Pseudo McPherso	on type, with triangular lower arms, coil spi	rings, telescopic hydraulic shock absorbe	rs and anti-roll bar
Rear			Flexible crossbar, coil springs, telescopic h		
CONSUMPTION (WLTP CYCLE)*					
Consumption (I/100km) combined cycle	min-max	7,1-7,5	5,7	5,7	5,8-5,9
CO ₂ (g/km) (combined cycle) min-max		162-172	150	150	153-155

^{*} The data on fuel consumption and CO₂ emissions shown in the table are still DRAFT and may not be representative of CO₂ emissions and actual consumption, which depend on multiple factors relating, by way of example and not exhaustively, to the driver's driving style, weather and road conditions, status, the equipment and load of the vehicle.

NEW DOBLÒ COMBI







VERSION	СОМВІ	
EXTERNAL DIMENSION (MM)	STANDARD	
Overall length	4403	
Min. overall height (in running ordrer) without / with roof bars	1800 / 1837	
Width without wing mirror / wing mirrors folded / deployed	1848 / 1921 / 2107	
Wheelbase	2785	
Front overhang	892	
Rear overhang	726	
Front track	1553	
Rear track	1567	
Ground clearance (in running ordrer)	160	
LOAD COMPARTMENT DIMENSIONS (MM)		
Max. loading length (passenger seatback retracted)	2700	
Max. loading length behind row 1 (maximum forward position)	1880	
	1000	
Boot width between wheel arches	1195	
Max. loading height	1200	






		DOBLÒ COMBI NI			
ENGINE	PURETECH 110 S&S	BLUEHDI 100 S&S	BLUEHDI 130 S&S		
Гуре	Turbo Gasoline High Pressure Direct Injection	Turbo Diesel High Pres	ssure Direct Injection		
Number of cylinders – valves per cylinder	3 - 4	4 -	4		
Displacement (cm³)	1199	1199 1499			
Max Power in kW	81 @ 5500 rpm	75 @ 3750 rpm	96 @ 3750 rpm		
Max Torque in Nm	230 @ 1750 rpm	250 @ 1750 rpm	300 @ 1750 rpm		
Anti pollution regulation		EURO 6.4			
Stop&Start		Standard			
Gear Shift Indicator		Standard			
TRANSMISSION					
Gearbox		Manual			
Gears		6			
STEERING					
Turning diameter between platforms (m)	16" Wheels : 10,8 17" Wheels : 11	16" Wheels : 10,8 17" Wheels : 11	16" Wheels : 10,8 17" Wheels : 11		
SUSPENSIONS - BRAKES - TYRES					
ront / rear suspension		PseudoMc Pherson / Flexible Crossmember			
ront / rear brakes	Ventilated Discs / Discs				
Front / rear tyres	205/60 R16 92 H 205/55 R17 95 V	205/60 R16 92 H 205/55 R17 95 V 205/55 R17 95 V			
VOLUMES (LITERS)					
lumber of seats		5			
Trunk volume under the shelf / under the roof		775 / 1355			
Trunk volume with folded 2 nd row seats under the shelf / under the roof		1414 / 3 000			
MASS (KG)					
Ainimum unladen weight ⁽¹⁾	1441	1505	1505		
Payload	609	615	625		
otal mass	2050	2120	2130		
Maximum towable masses: - Braked trailer	1150	1500	1500		
FUEL AND ADBLUE® (LITERS)					
Gasoline	60				
Diesel		53	3		
AdBlue®	-	17			
CONSUMPTION AND EMISSIONS ON WLTP CYCLE*					
Comined consumption	7,1	5,7	5,7		
CO ₂ Combined	162	150	150		

^{*} Values in the process of being approved (1) Masses may vary depending on equipment.



NEW E-DOBLÒ

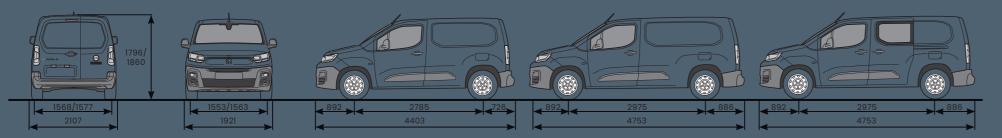

VERSIONS			٧	CREW CAB			
EXTERNAL DIMENSION (M		STAN	DARD	MA	\XI		
Length		44	103	47	53	4753	
Width (excluding rear-view n	nirrors)		48	18-	48	1848	
Height (in running order) mir			1860 ⁽¹⁾	1796 /		1796 / 1860 ⁽¹⁾	
Wheelbase		27	85	29		2975	
Front/rear overhang		892	/ 726	892 /	886	892 / 886	
Front/rear track		from 1553 to 1563		from 1553 to 1563 ,		from 1553 to 1563 / from 1568 to 1577	
LOAD COMPARTMENT DIM	(ENSIONS (MM)						
Length without / with openi (Magic Cargo)	ng for long loads	1817 /	3090	2167 /	3440	2220 / 3440	
Width without / with 1 / with 2	2 sliding side doors	1733 / 16	30 / 1527	1733 / 163	30 / 1527	1733 / 1630 / 1527	
Width at Wheel arches		12	29	12:	29	1229	
Height		min 1200	max 1270	min 1200	max 1270	min 1200 max 1270	
Side door:	w bulkhead	675 ,	1072	675 / 1072		675 / 1072	
max width/height	w/o bulkhead	759 /	1072W	759 /	1072	759 / 1072	
Rear door: width/height		1241	/ 1196	1241 /	1196	1241 / 1196	
Volume (m³) without / with Magic Cargo			/ 3,8	3,9 / 4,4		3,5 / 4,0	
MASS* (KG)							
		PAYLOAD: 800 kg					
		2 seats	3 seats	2 seats	3 seats	5 seats	
	мс	2390	2410	2385	2400	2450	
PU		8	00	75	53	721	
100 kw El. Engine	L	1200 / 1400	1200 / 1400	1200 / 1400	1200 / 1400	1200 / 1400	
	RIM	750	750	750	750	750	

^{*}The indicated payloads may vary according to the final configuration of the vehicle

(i) with worksite pack

PU: PAYLOAD - RIM: TOWABLE MASS - MC: TOTAL MASS - L: LIMIT LOAD FRONT/REAF

TECHNICAL SPECIFICATION

	ELECTRIC MOTOR
MOTOR	BATTERY 50 KWH
Electric Motor Type	Synchronous with permanent magnet/ 4 pairs
Motor max power kW	100 (136) @ 5500 rpm
Motor max torque Nm	260
TRANSMISSION	
Туре	single gear
STEERING	
Turning diameter Between sidewalks / Between walls (m) - Standard	10,8 / 11,3
Turning diameter Between sidewalks / Between walls (m) - MAXI	11,4 / 11,9
GROUND CONNECTION - BRAKES - TYRES	
Front/rear suspensions	Type Pseudo-Mac Pherson / Crossbeam with flexible cross member
Front / rear brakes	Ventilated discs / Discs
Tyres	205/60 R16 95U
Emergency equipment	Standard: Pneumatic fixing kit / accessory: 16" steel spare wheel
PERFORMANCE (SINGLE DRIVER)	
Maximum speed (km/h)	130
0-100 km/h (s)	11,2
80 à 120 km/h	8,9
WLTP CONSUMPTION	
Autonomy (km) maximum combined cycle (variable according to version and options)	Up to 282
Consumption Wh/km (low/high)*	196-199
Battery capacity (kWh)	50

^{*} The consumption data shown in the table may not be representative of actual consumption, which depend on multiple factors relating, but are not limited to, the driver's driving style, weather and road conditions, equipment and load of the vehicle.

